

## BARIO

The pendant lamp Bario, thanks to its minimalist design, enlighten your spaces in an innovative and personalized way. You can experiment and have fun designing your space with light.

**The opal plexiglass diffuser spreads the light at 360 degrees**, illuminating the surrounding environment evenly.


The structure is in black plastic, equipped with two steel tie rods for ceiling mounting and comes with transparent power cable.

The power supply is external and can be positioned in the false ceiling or, alternatively, inside a canopy kit that can be purchased separately as an accessory.

An extremely flexible lamp, which stimulates the installer's creativity: **it can be used individually but it also perfectly fits into customized compositions, even in large rooms.**

Bario is available in warm white, cool white and RGB versions. Thanks to our powerful APP, it is able to project one color or more colors at the same time, creating lights effects, making it suitable also for particular environments such as bars, shops and exhibitions.

Thanks to the LED technology, consumption is significantly reduced while maintaining a very high light output.

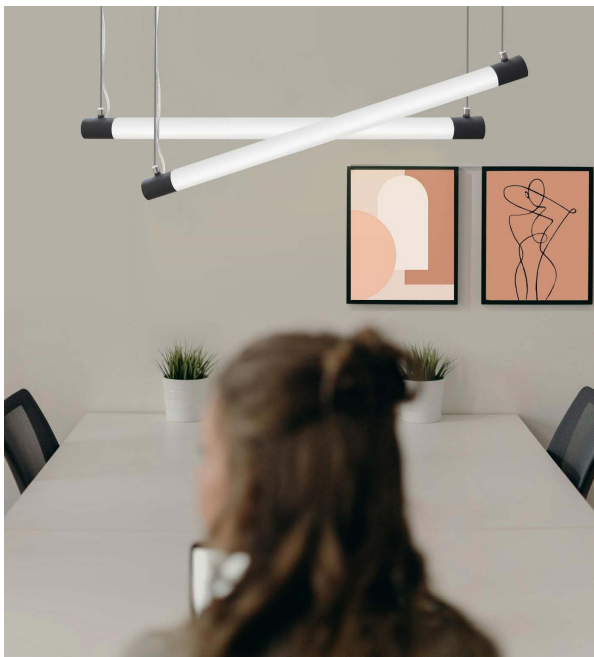

### Product features

**MADE IN ITALY**

Voltage:	100-277VAc
IP Grade:	IP20 (internal use only)
Operating T°:	20 °C a +40 °C
Lifespan:	50,000 hours without changes in light intensity 100,000 hours of absolute duration
Dimmer:	integrated
Light color:	warm white (3000°K) - cool white (5000°K) - RGB
Fixture Color:	black
Diffuser:	opal white
Cable:	transparent 1.2m
Tie rods:	stainless steel 1m
Sizes:	Ø40mm length 430   730   1030mm



All Illunalice lamps can be managed with the ezon.io APP and can be integrated into the ezon.io smart home.

Download the APP for free from the App Store and Google Play.

To find out more, visit [www.ezon.io](http://www.ezon.io).

Bario is made according to the provisions of the CEI EN 60598-1 standard and complies with the EMC directive 89/336 EEC and with the directive 72/23 EEC - 93/68 EEC - 2002/95 / EC

**CE** RoHS

Code	Typical luminous flux lm	Max. Consumption W	Length mm	Color °K
9.000.058	1550*	9	430	3000
9.000.059	1600*	9	430	5000
9.000.056	2900*	15	730	3000
9.000.057	3000*	15	730	5000
9.000.055	4650*	25	1030	3000
9.000.034	4800*	25	1030	5000
9.000.060		42	1030	RGB

\*referred to LED modules. Depending on the type of diffuser, a maximum reduction of 20% must be considered.