

## MAGNESIO



Magnesio, thanks to its minimalist Italian design lines, illuminates your spaces in an innovative and personalized way. You can have fun creating your space with light.

The opal plexiglass diffuser emanates light uniformly at 360 degrees, illuminating the vertical areas.

The main structure is in black plastic and is sustained by the power cable itself (available in the red or grey)

The power supply is external and can be positioned in the false ceiling or, alternatively, inside a canopy kit that can be purchased separately as an accessory.

An extremely flexible lamp, which stimulates the installer's creativity: it can be used individually but it also perfectly fits into customized compositions, even in large rooms.

Thanks to the LED technology, consumption is significantly reduced while maintaining a very high light output.

### Product features

**MADE IN ITALY**

Voltage:	100-277VAc
IP Grade:	IP20 (internal use only)
Operating T°:	-20 °C +40 °C
Lifespan:	50.000 hours without changes in light intensity 100.000 hours of absolute duration
Dimmer:	integrated
Light color:	warm white (3000°K) or cool white (5000°K)
Material:	plastic and plexiglass
Fixture Color:	black
Diffuser:	opal white
Cable:	grey or red 1.5m
Size:	Ø40mm height 380mm   680mm
Canopy:	Ø40mm height 90mm


All Illunaluce lamps can be managed with the ezon.io APP and can be integrated into the ezon.io smart home.

Download the APP for free from the App Store and Google Play.

To find out more, visit [www.ezon.io](http://www.ezon.io). [www.ezon.io](http://www.ezon.io).

Magnesio is made according to the provisions of the CEI EN 60598-1 standard and complies with the EMC directive 89/336 EEC and with the directive 72/23 EEC - 93/68 EEC - 2002/95 / EC.

**CE** **RoHS**

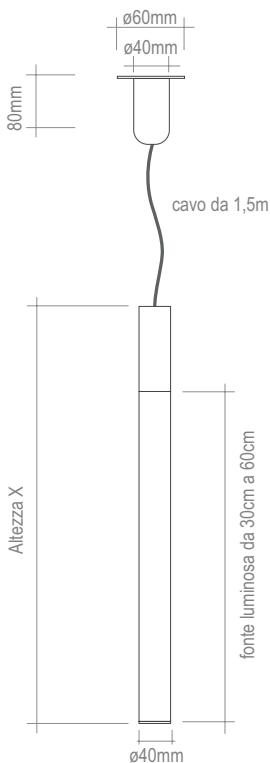

Code	Typical luminous flux	Max. Consumption	Height	Color
	lm	W	mm	°K
9.000.046	1550*	9	380	3000
9.000.047	1600*	9	380	5000
9.000.048	3100*	17	680	3000
9.000.049	3200*	17	680	5000

\*referred to LED modules. Depending on the type of diffuser, a maximum reduction of 20% must be considered.