



Caratteristiche

- Design ultra sottile con larghezza di 35 mm (2SU)
- Ingresso universale 85~264 V CA (277 V CA operativa)
- Nessun consumo di energia LOAD < 0,3 W
- Classe di isolamento II
- Passa LPS (fonte di alimentazione limitata)
- Tensione di uscita CC regolabile
- Protezioni: cortocircuito / sovraccarico / sovratensione
- Raffreddamento per convezione ad aria libera (temperatura di esercizio: -30~+70°C)
- Cooling by free air convection (working temperature:-30~+70°C)
- Guida DIN TS-35/7.5 o 15 montabile
- Indicatore LED per l'accensione
- 3 anni di garanzia

Applicazioni

- Sistema di controllo domestico
- Automazione degli edifici
- Sistema di controllo industriale
- Automazione di fabbrica
- Apparatı elettromeccanici


CODICE GTIN

Ricerca MW: <https://www.meanwell.com/serviceGTIN.aspx>

Descrizione

HDR-30 è una serie di alimentatori economici ultra sottili da 30 W su guida DIN, adatti per essere installati su TS-35/7.5 o guide di montaggio TS-35/15. Il corpo è progettato con una larghezza di 35mm (2SU), che consente di risparmiare spazio all'interno degli armadi. L'intera serie adotta l'intera gamma AC ingresso da 85 V CA a 264 V CA (277 V CA operativa) ed è conforme a BS EN/EN61000-3-2, la norma dell'Unione Europea per la corrente armonica. L'HDR-30 è progettato con un alloggiamento in plastica che può prevenire efficacemente i rischi elettrici dell'utente. Con efficienza di lavoro fino all'87%, l'intera serie può funzionare a temperatura ambiente compresa tra -30°C e 70°C in regime di convezione dell'aria. Le funzioni di protezione complete e i relativi certificati per le automazioni domestiche e gli apparati di controllo industriale (IEC62368-1, UL508, UL62368-1, BS EN/EN61558-2-16) rendono HDR-30 un prodotto molto competitivo soluzione di alimentazione per applicazioni domestiche e industriali.

Codifica del modello

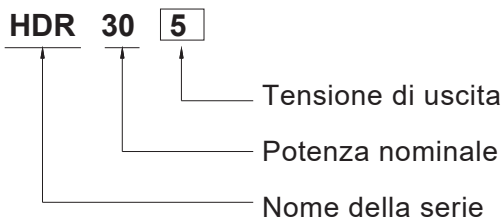

Alimentatore 220Vac 5Vdc 15W mont. guida DIN cod.9.000.081



Guida DIN a forma di gradino


HDR-30 serie

SPECIFICHE


MODEL	HDR-30-5	HDR-30-12	HDR-30-15	HDR-30-24	HDR-30-48	
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	48V
	RATED CURRENT	3A	2A	2A	1.5A	0.75A
	CURRENT RANGE	0 ~ 3A	0 ~ 2A	0 ~ 2A	0 ~ 1.5A	0 ~ 0.75A
	RATED POWER	15W	24W	30W	36W	36W
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	120mVp-p	150mVp-p	240mVp-p
	VOLTAGE ADJ. RANGE	4.5 ~ 5.5V	10.8 ~ 13.8V	13.5 ~ 18V	21.6 ~ 29V	43.2 ~ 55.2V
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME	500ms, 50ms/230VAC 500ms, 50ms/115VAC at full load				
HOLD UP TIME (Typ.)	30ms/230VAC 12ms/115VAC at full load					
INPUT	VOLTAGE RANGE	85 ~ 264VAC (277VAC operational)		120 ~ 370VDC (390VDC operational)		
	FREQUENCY RANGE	47 ~ 63Hz				
	EFFICIENCY (Typ.)	82%	88%	89%	89%	90%
	AC CURRENT (Typ.)	0.88A/115VAC 0.48A/230VAC				
	INRUSH CURRENT (Typ.)	COLD START 25A/115VAC 45A/230VAC				
PROTECTION	OVERLOAD	105 ~ 160% rated output power Hiccup mode when output voltage <50%, recovers automatically after fault condition is removed Constant current limiting within 50% ~ 100% rated output voltage, recovers automatically after fault condition is removed				
	OVER VOLTAGE	5.75 ~ 7.5V	15 ~ 18V	18.8 ~ 22.5V	30 ~ 36V	57.6~ 67.2V
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing				
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C) RH non-condensing				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6				
	OPERATING ALTITUDE	2000 meters				
	OVER VOLTAGE CATEGORY	III ; According to EN61558, EN50178, EN60664-1, EN62477-1 ; altitude up to 2000 meters				
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL62368-1, UL508, TUV BS EN/EN61558-2-16, BS EN/EN61558-1, IEC62368-1, EAC TP TC 004, BSMI CNS14336-1 approved; Design refer to TUV BS EN/EN62368-1				
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC				
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH				
	EMC EMISSION	Parameter	Standard			Test Level / Note
		Conducted	BS EN/EN55032(CISPR32), CNS13438			Class B
		Radiated	BS EN/EN55032(CISPR32), CNS13438			Class B
		Harmonic Current	BS EN/EN61000-3-2			Class A
	Voltage Flicker	BS EN/EN61000-3-3			-----	
	EMC IMMUNITY	BS EN/EN55035, BS EN/EN61000-6-2, BS EN/EN61204-3				
		Parameter	Standard			Test Level /Note
ESD		BS EN/EN61000-4-2			Level 3, 8KV air; Level 2, 4KV contact, criteria A	
Radiated Susceptibility		BS EN/EN61000-4-3			Level 3, criteria A	
EFT/Burest		BS EN/EN61000-4-4			Level 3, criteria A	
Surge		BS EN/EN61000-4-5			Level 4, 2KV/L-N, criteria A	
Conducted		BS EN/EN61000-4-6			Level 3, criteria A	
Magnetic Field		BS EN/EN61000-4-8			Level 4, criteria A	
Voltage Dips and interruptions	BS EN/EN61000-4-11			>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods		
OTHERS	MTBF	3670.4K hrs min. Telcordia SR-332 (Bellcore) ; 968.1K hrs min.		MIL-HDBK-217F (25°C)		
	DIMENSION	35*90*54.5mm (W*H*D)				
	PACKING	0.13Kg;96pcs/14.2Kg/1.04CUFT				
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µf & 47µf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p> <p>5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>					




■ Block Diagram

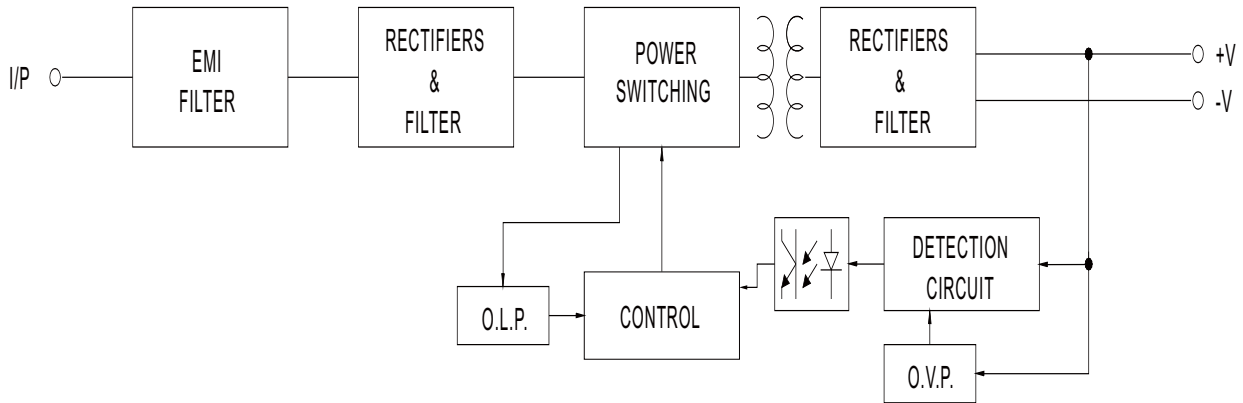

■ Derating Curve

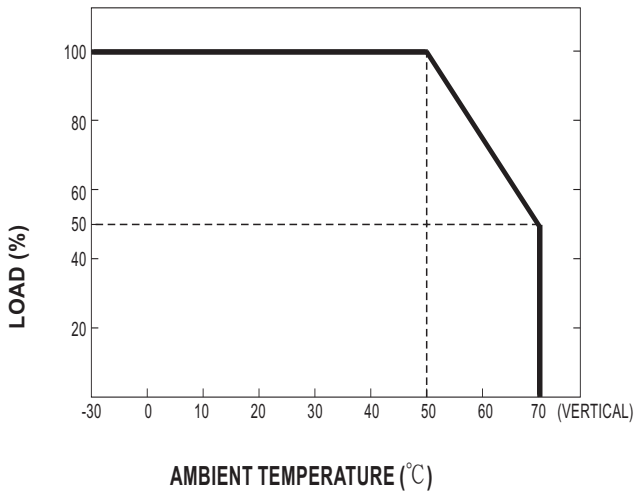



■ Output Derating VS Input Voltage

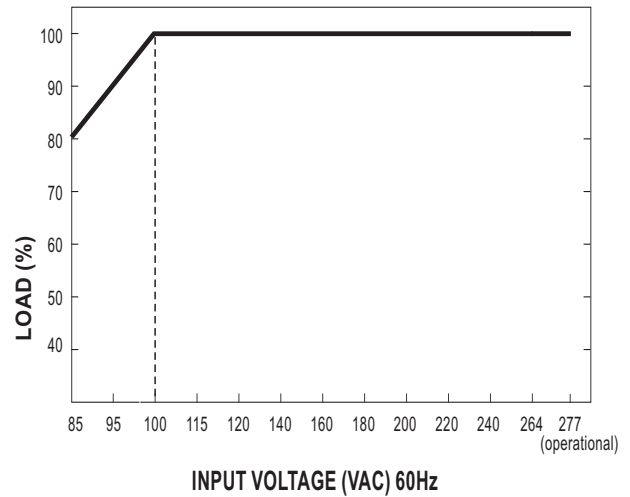



Mechanical Specification

(Unit: mm , tolerance $\pm 0.5\text{mm}$)

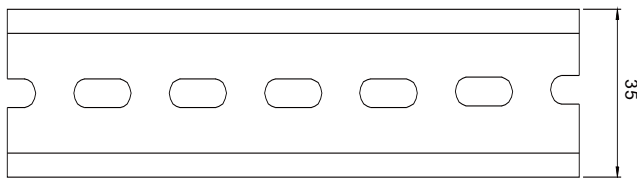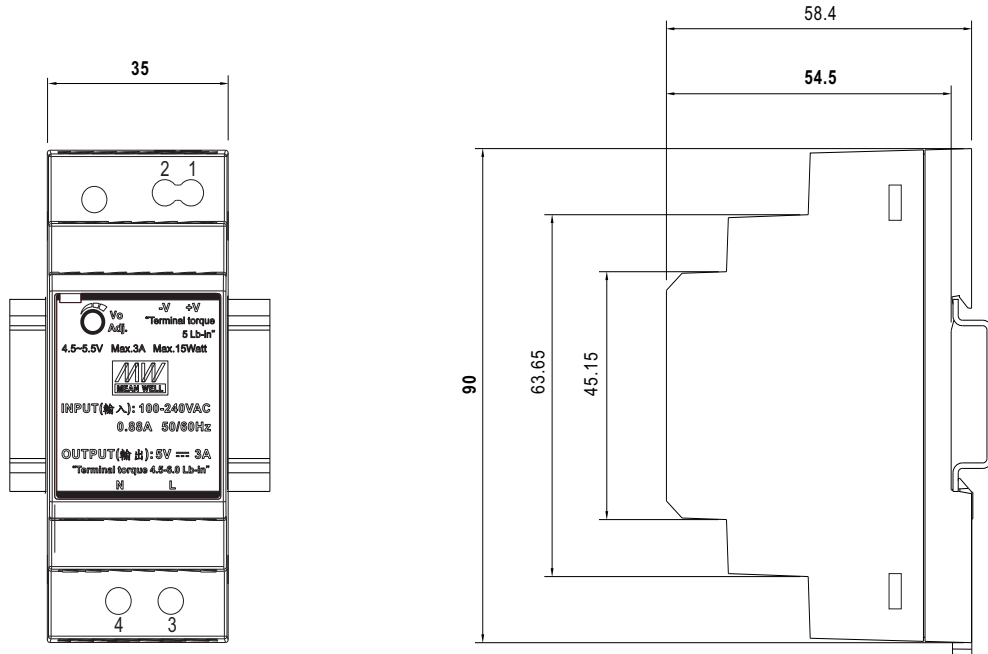

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	+V	3	AC/L
2	-V	4	AC/N