


DALI BUS POWER cod.9.000.076

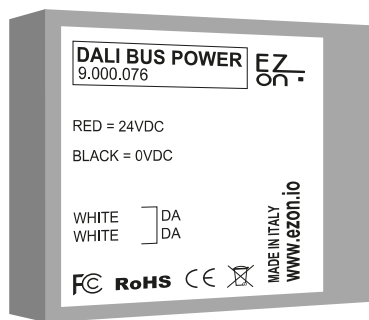

Product code: 9.000.076
Voltage: 24VDC - 300mA
Output: nominal 18V, limited in nominal current 230mA50 x
Size: 40 x 10mm
Warranty: 2 years

 **MADE IN ITALY**
FC RoHS CE 

ezone.io Dali Bus Power is a power supply for Bus Dali.


ezone.io Dali Bus Power generates the power required for an IEC62386 bus.

Attention: only one **ezone.io Dali Bus Power** can be connected to an IEC62386 bus. No other power source should be connected to the same IEC2386 bus when ezone.io Dali Bus Power is used.

ezone.io Dali Bus Power requires $24V \pm 10\%$ a 300mA.

The IEC62386 bus must be connected to the DA+ and DA-. Polarity does not have to be respected. Typical output current (bus current) is 230mA.

The LED indicates bus power and will flash during data transfer.

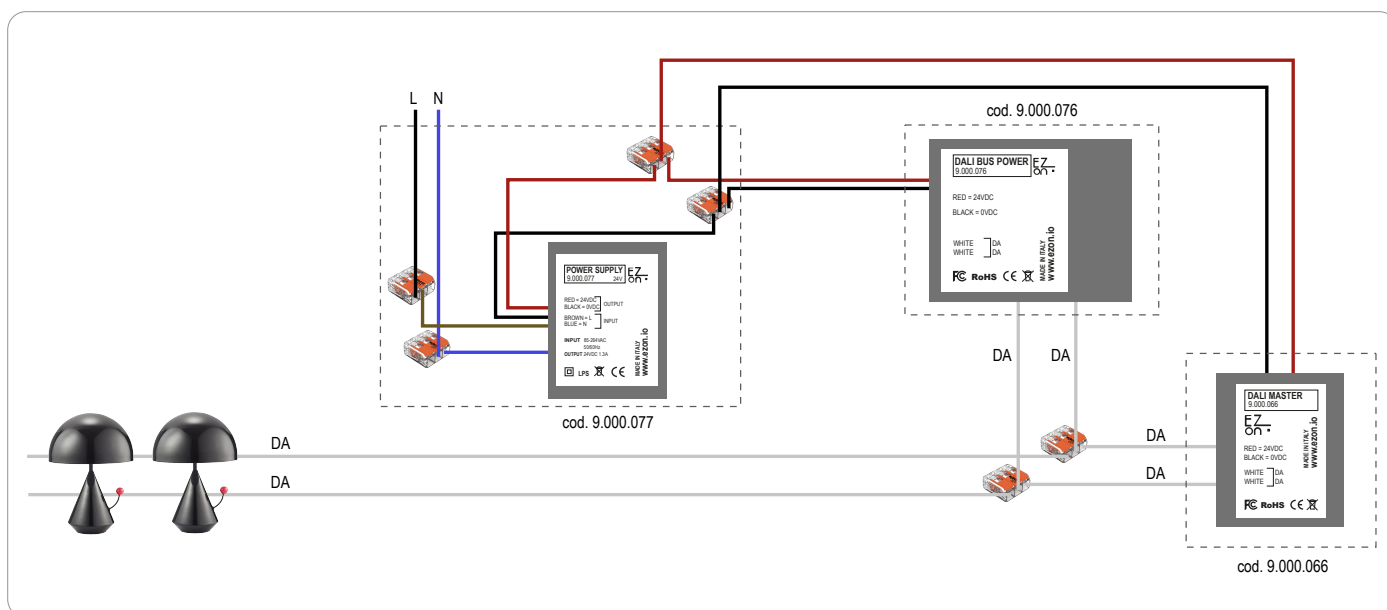

The ezone.io ecosystem is manageable and programmable with the ezone.io companion APP. Available for free download from App Store and Google Play.



The ezone.io products should not ever be used in any way to manage medical devices or other technical products which are critical for the functioning of lifesaving or supporting systems, cause in the case of failure that may lead to the death or injury of a person. Usage of ezone.io devices in such systems requires the explicit written permission of the Mediatech Srl CEO.

For further information www.ezon.io.

